




Probe

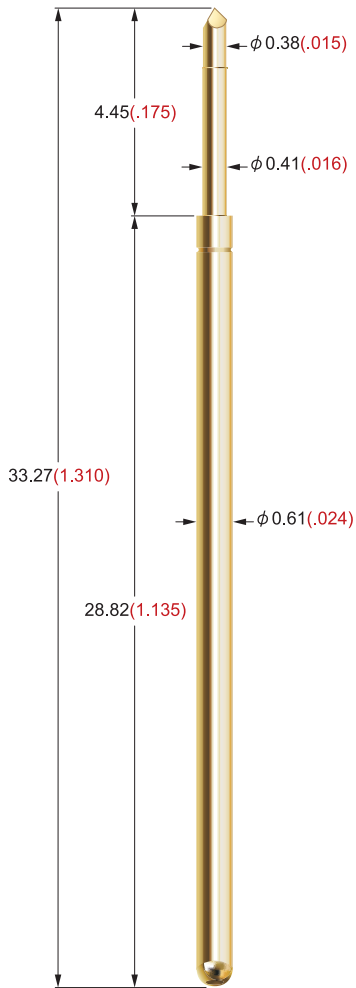

Tip Style	Steel Plunger	
	ϕ 0.41(.016)	B
	ϕ 0.28(.011)	F028
	ϕ 0.41(.016)	F
	ϕ 0.41(.016)	IPW
	ϕ 0.38(.015)	T038

Probe Specifications 探针规格

Minimum Centers 最小间距 : 1.00 (.039)
 Full Travel 最大行程 : 4.45 (.175)
 Current Rating 额定电流 : 3amps
 Probe Resistance 阻抗 : 25m Ω
 Operating Temp. 操作温度 : -10°C~+120°C

Spring Force 弹力

@2.72(.107) travel


99g	[3.8oz]	[0.98N]
153g	[5.5oz]	[1.5N]
200g	[7.0oz]	[2.0N]

How To Order Probes

Example : ICT39Q-B-153-S

ICT39Q-	Tip Style	Spring Force(g)	Steel Plunger
	B	153	S
	针头类型	弹力(克)	钢针

Receptacle

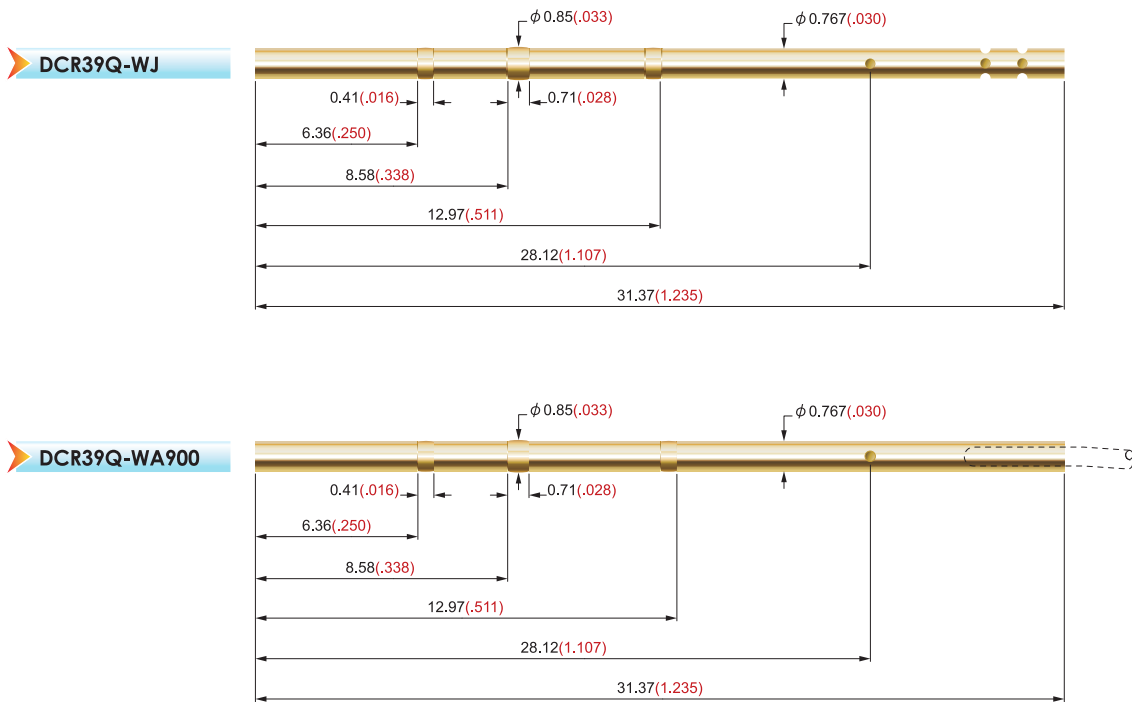

Mounting Hole Size 安装孔径

- 0.78/0.81 (.0307)/(.0319)

Materials 材质

- Plunger 针头 : Steel, gold plated 高碳钢, 镀金
- Barrel 内管 : PhBr, gold plated 磷青铜, 镀金
- Spring 弹簧 : Stainless steel 不锈钢线
- Receptacle 套管 : PhBr, gold plated 磷青铜, 镀金

How To Order Receptacles

>> Part Number	>> Connections	>> Description
DCR39Q-WJ	wire jack 插线端子	length 31.37(1.235) , with 3 press-ring
DCR39Q-WA900	wire pre-attached 已含线	vacuum sealed