





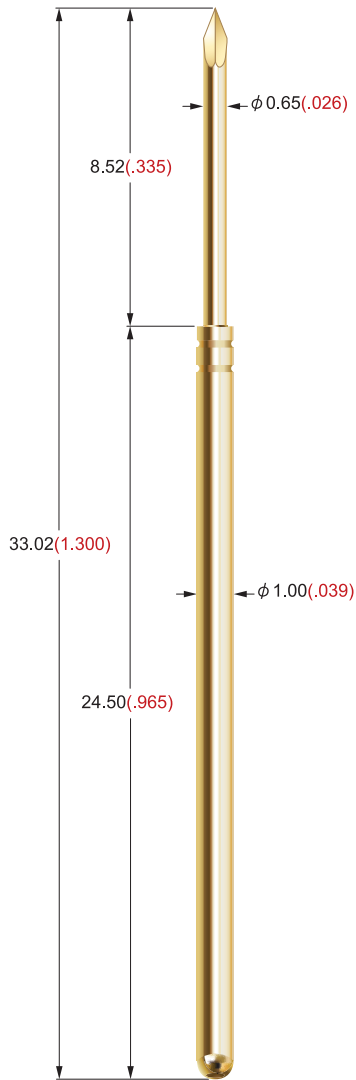


Probe



Tip Style	BeCu Plunger	
	ϕ 1.19(.047)	A119
	ϕ 0.65(.026)	D
	ϕ 1.19(.047)	H119
	ϕ 1.19(.047)	T119

Probe Specifications 探针规格

Minimum Centers 最小间距 : 1.91 (.075)
 Full Travel 最大行程 : 6.35 (.250)
 Current Rating 额定电流 : 3amps
 Probe Resistance 阻抗 : <20mΩ
 Operating Temp. 操作温度 : -10°C~+120°C

Spring Force 弹力

@4.24(.167) travel

57g	[2.0oz]	[0.65N]
114g	[4.0oz]	[1.1N]
170g	[6.0oz]	[1.68N]
227g	[8.1oz]	[2.24N]

How To Order Probes


Example : **ICT75E-B-227-S**

	Tip Style	Spring Force(g)	Steel Plunger
ICT75E-	B	227	S
	针头类型	弹力(克)	钢针


Receptacle

Tip Style	Steel Plunger
	ϕ 0.65(.026) B
	ϕ 0.65(.026) BP
	ϕ 0.65(.026) BT
	ϕ 0.65(.026) F
	ϕ 0.99(.039) F099 1.34(.053)
	ϕ 0.46(.018) UTF046
	ϕ 1.19(.047) 7JH119 1.37(.054)
	ϕ 1.19(.047) 8J119 2.03(.080)
	ϕ 1.19(.047) K119 2.03(.080)
	ϕ 0.65(.026) 6PW


DCR75-CR

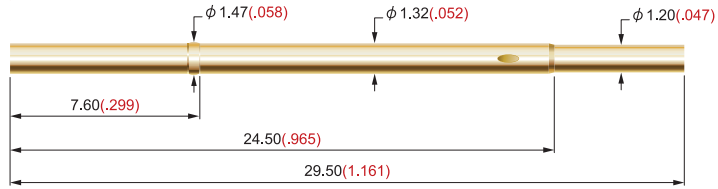

DCR75-SC

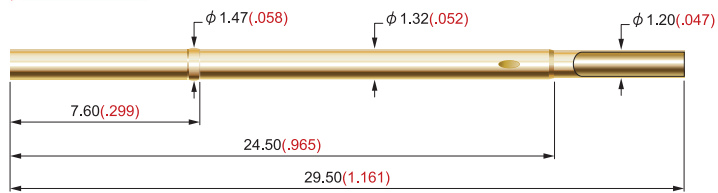

DCR75-WW-□

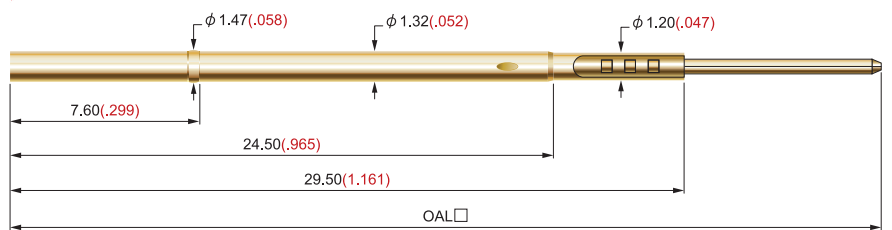

□ available in 36/40.61/43/47.6

Mounting Hole Size 安装孔径

- 1.35/1.40 (.0530)/(.0550)

Materials 材质

Plunger 针头 : BeCu or Steel, gold plated 铍铜或高碳钢, 镀金

Barrel 内管 : PhBr, gold plated 磷青铜, 镀金

Spring 弹簧 : Stainless steel, gold plated 不锈钢线, 镀金

Receptacle 套管 : Nickel Silver, gold plated 白铜, 镀金

Square Post 四方柱 : Brass, gold plated 黄铜, 镀金

How To Order Receptacles

>> Part Number	>> Connections	>> Description
DCR75-CR	crimp 空管	length 29.5(1.161)
DCR75-SC	solder cup 焊杯	length 29.5(1.161)
DCR75-WW-36	square wire wrap post 绕线柱	length 36.00(1.417) , post length 6.5(.256) , vacuum sealed
DCR75-WW-40.61	square wire wrap post 绕线柱	length 40.61(1.599) , post length 11.11(.437) , vacuum sealed
DCR75-WW-43	square wire wrap post 绕线柱	length 43.00(1.693) , post length 13.5(.531) , vacuum sealed
DCR75-WW-47.6	square wire wrap post 绕线柱	length 47.60(1.874) , post length 18.1(.713) , vacuum sealed