






Probe

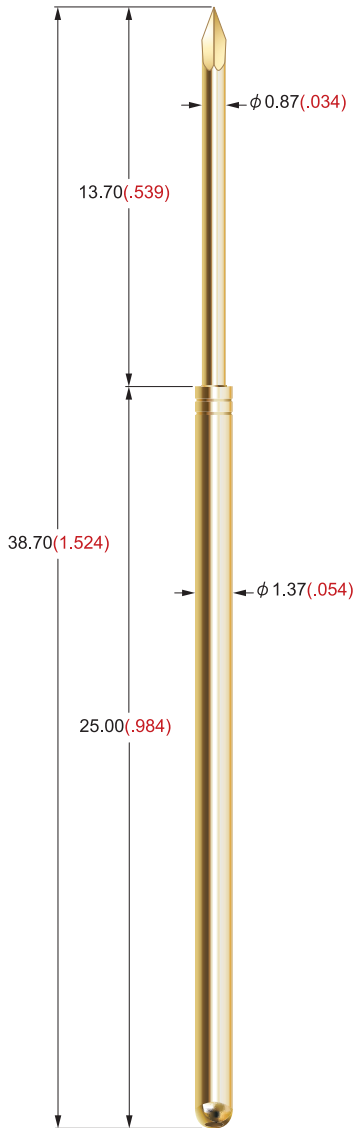

Tip Style	BeCu Plunger	
	$\phi 1.30(.051)$	A130
	$\phi 0.87(.034)$	G
	$\phi 1.30(.051)$ $\phi 1.50(.059)$	H130/150
	$\phi 1.50(.059)$	T150

Probe Specifications 探针规格

Minimum Centers 最小间距 : 2.54(.100)
 Full Travel 最大行程 : 11.70 (.461)
 Current Rating 额定电流 : 3amps
 Probe Resistance 阻抗 : < 30m Ω
 Operating Temp. 操作温度 : -10°C~+120°C

Spring Force 弹力

@9.60(.378) travel

151g	[5.4oz]	[1.5N]
202g	[7.2oz]	[2.0N]
302g	[10.8oz]	[3.0N]

How To Order Probes


Example : ICT100NL-BP-202-S

	Tip Style	Spring Force(g)	Steel Plunger
ICT100NL-	BP	202	S
	针头类型	弹力(克)	钢针


Receptacle

Tip Style	Steel Plunger
	$\phi 0.87(.034)$ B
	$\phi 0.87(.034)$ BP
	$\phi 0.50(.020)$ F050
	$\phi 1.30(.051)$ $\phi 1.50(.059)$ F130/150
	$\phi 1.30(.051)$ 7J130


DCR100-CR

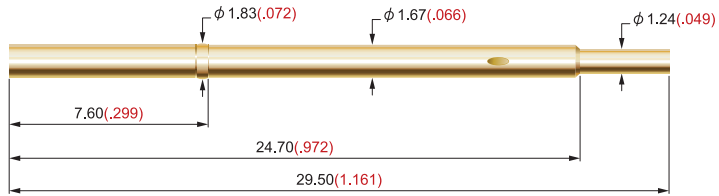

DCR100-SC

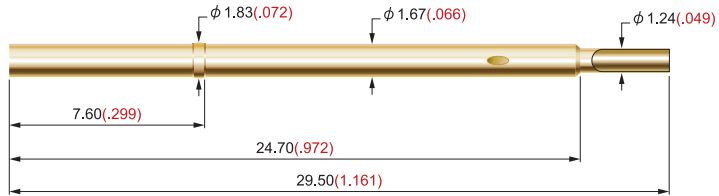


DCR100-WW-□

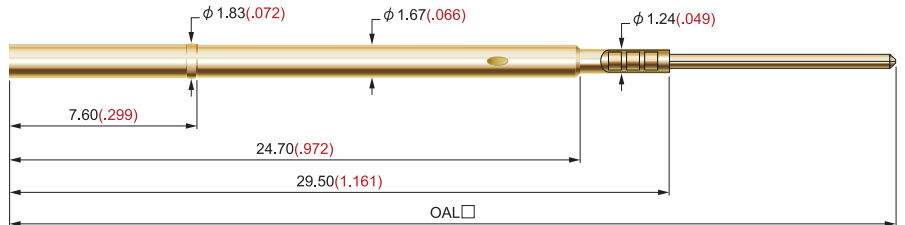

□ available in 36/40.49/43/47.6

DCR100-WW-□-V

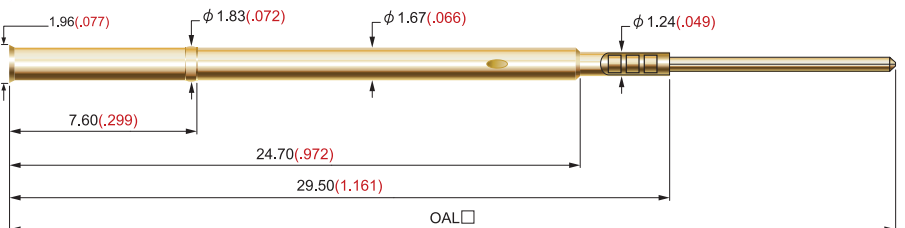

□ available in 36/40.49/43/47.6

ICT 100 NI

Mounting Hole Size 安装孔径

- 1.73/1.78 (.068)/(.070)

Materials 材质

Plunger 针头: BeCu or Steel, gold plated 铍铜或高碳钢, 镀金

Barrel 内管: PhBr, gold plated 磷青铜, 镀金

Spring 弹簧: Stainless steel 不锈钢线

Receptacle 套管: Nickel Silver, gold plated 白铜, 镀金

Square Post 四方柱: Brass, gold plated 黄铜, 镀金

How To Order Receptacles

>> Part Number	>> Connections	>> Description
DCR100-CR	crimp 空管	length 29.5(1.161)
DCR100-SC	solder cup 焊杯	length 29.5(1.161)
DCR100-WW-36	square wire wrap post 绕线柱	length 36.00(1.417), post length 6.5(.256), vacuum sealed
DCR100-WW-40.49	square wire wrap post 绕线柱	length 40.49(1.594), post length 10.99(.433), vacuum sealed
DCR100-WW-43	square wire wrap post 绕线柱	length 43.00(1.693), post length 13.5(.531), vacuum sealed
DCR100-WW-47.6	square wire wrap post 绕线柱	length 47.60(1.874), post length 18.1(.713), vacuum sealed
DCR100-WW-□-V	square wire wrap post 绕线柱	with flange, □ available in 36/40.49/43/47.6, vacuum sealed